


BLUESTONE

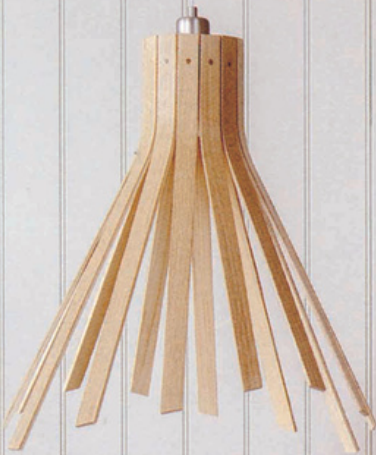

Bluestone

Specifications

Construction	Multi Level Loop
Fibre	100% Solution Nylon
Gauge	1/12"
Stitches	10 per inch
Pile Weight	21 oz/yd2
Pile Height	2.5mm - 5.5mm ± (0.5mm)
Backing	eco back (pvc free)
Tile Size	50cm x 50cm
Packing	20 pcs/Box
Traffic Classification	Class III Heavy Commercial

Performance

FLAMMABILITY

Radiant Panel	Pass - Class I (ASTM E 648)
Methenamine Pill	Pass - 8 (ASTM D 2859)
Smoke Density	Pass - Max 450 (ASTM E 662)

COLOURFASTNESS

to light	Pass - 5 (AATCC 16 E)
to wet and dry crocking	Pass - 5 (AATCC 165)

STABILITY

Dimensional stability	Pass - 0.2% (AACHEN)
Tuft Bind	Pass - 8.0 lbs (ASTM D1335)
Static Propensity	Pass - 3.5 Kv (AATCC 134)
Castor Chair	Pass - 2.8 (BS EN 985)
	Pass - 3 (AATCC 165)

Green carpet (VOC)	CRI Green Label Accredited GLP 6331#/6330#
Acoustic-Nylon (VOC)	BS EN ISO 354 Absorption Coefficient - NRC 0.15




02 - Light Grey
05 - Beige




04 - Dark Grey
02 - Light Grey


Bluestone

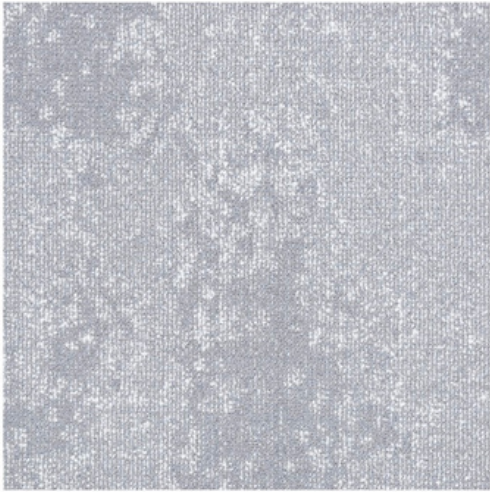

01

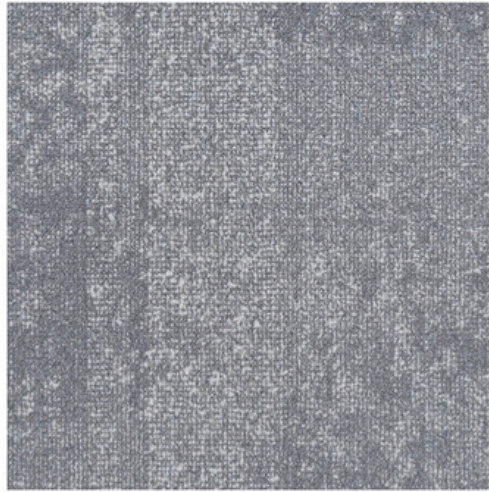

02

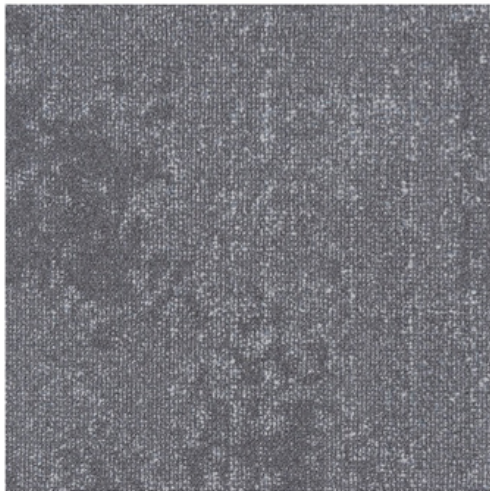

03



04



05



01- Silver Grey
02 - Light Grey
04 - Dark Grey



02 - Light Grey
05 - Beige