

# SKYWALK



04 - Shadow Grey  
05 - Charcoal Grey

# Skywalk

## Specifications

Construction	Multi Level Loop
Fibre	100% Solution Dyed Olefin
Gauge	1/12"
Stitches	10 per inch
Pile Weight	20 oz/yd <sup>2</sup>
Pile Height	4mm ± (0.5mm)
Backing	Eco Back (PVC free)
Tile Size	25cm x 100cm
Packing	20 pcs/Box

## Performance

### FLAMMABILITY

Radiant Panel	Pass - Class I (ASTM E 648)
Methenamine Pill	Pass - 8 (ASTM D 2859)
Smoke Density	Pass - Max 450 (ASTM E 662)

### COLOURFASTNESS

to light	Pass - 5 (AATCC 16 E)
to wet and dry crocking	Pass - 5 (AATCC 165)

### STABILITY


Dimensional stability	Pass - 0.2% (AACHEN)
Tuft Bind	Pass - 8.0 lbs (ASTM D1335)
Static Propensity	Pass - 3.5 Kv (AATCC 134)
Castor Chair	Pass - 2.8 (BS EN 985)
Hexapod Drum	Pass - 3 (ASTM D5252)
Green carpet (VOC)	<b>CRI Green Label Accredited GLP 6331#</b>

04 - Shadow Grey  
47 Kelly Green



05 - Charcoal Grey  
59 Tiffany Blue

# Skywalk

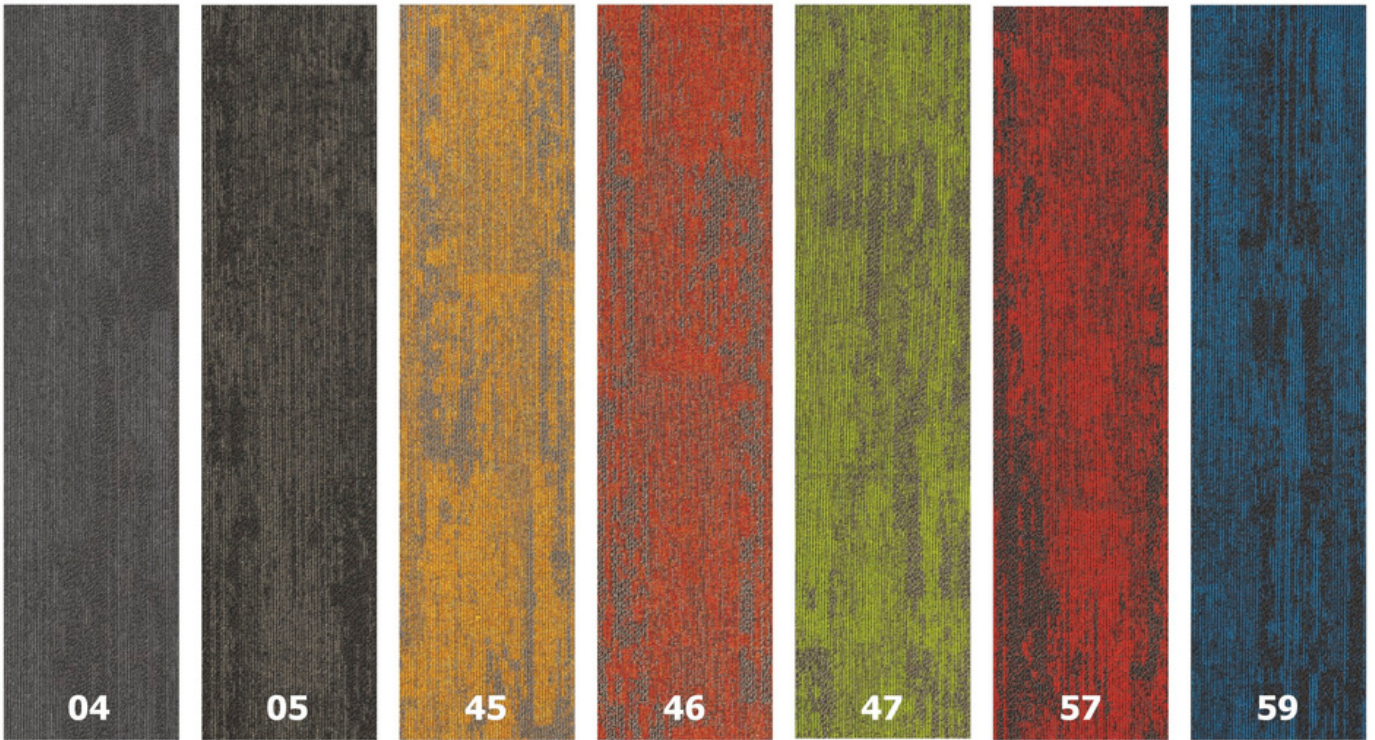



04 - Shadow Grey  
05 - Charcoal Grey



**05 Charcoal Grey**  
**57 Scarlet Red**  
**59 Tiffany Blue**