



COLOUR S P A C E

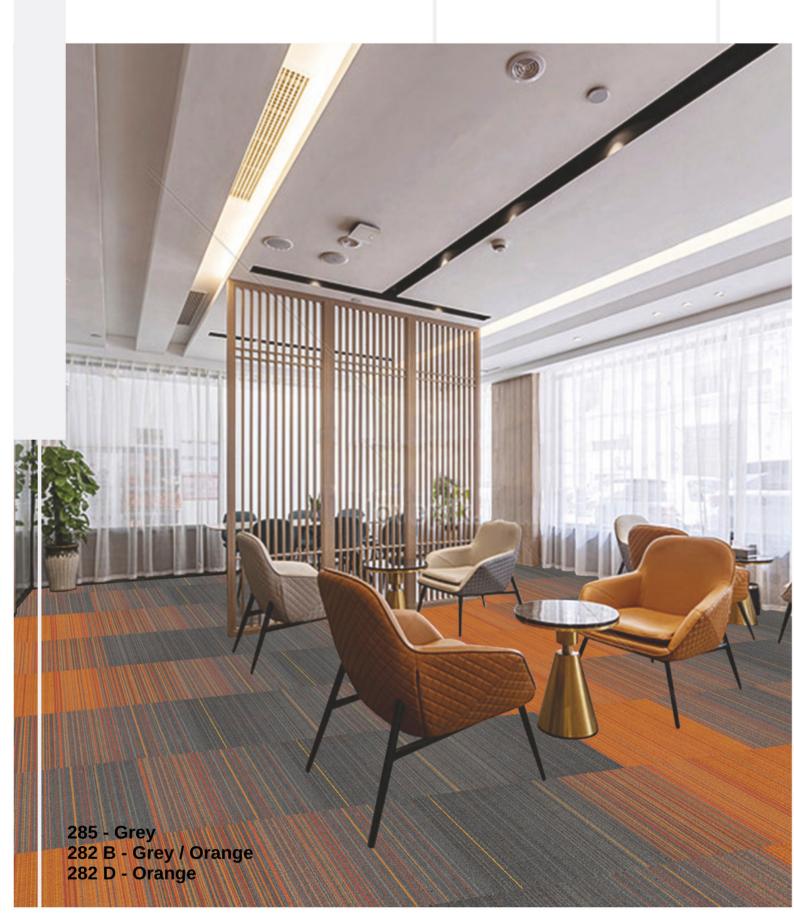

# COLOUR S P A C E

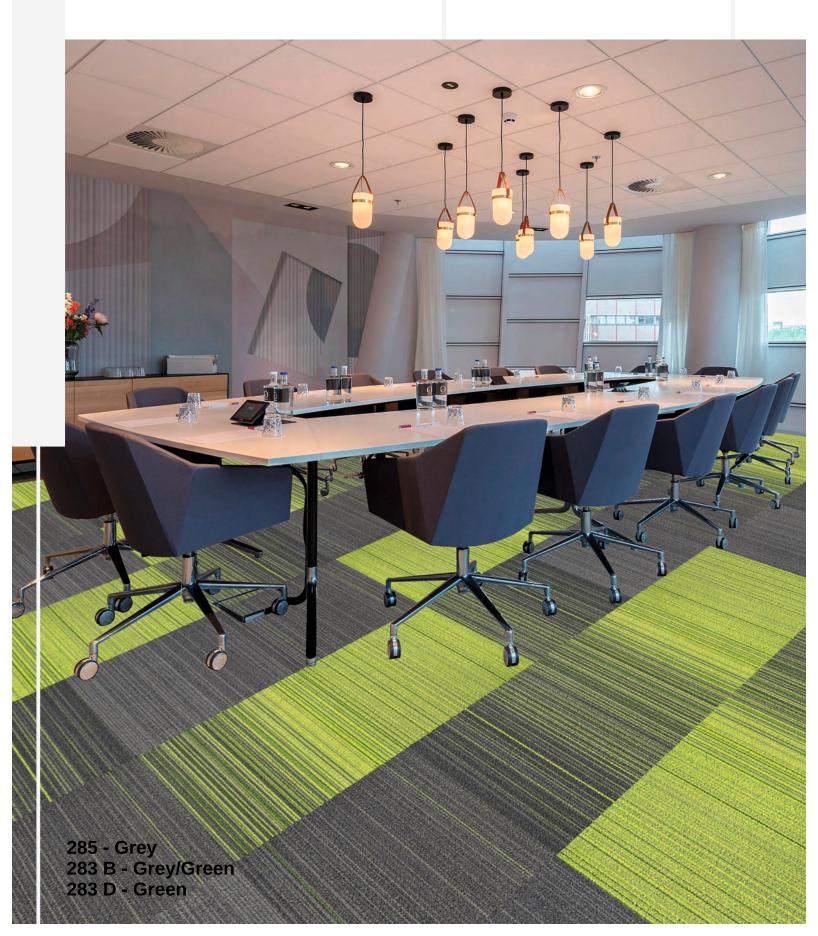

## COLOUR S P A C E


















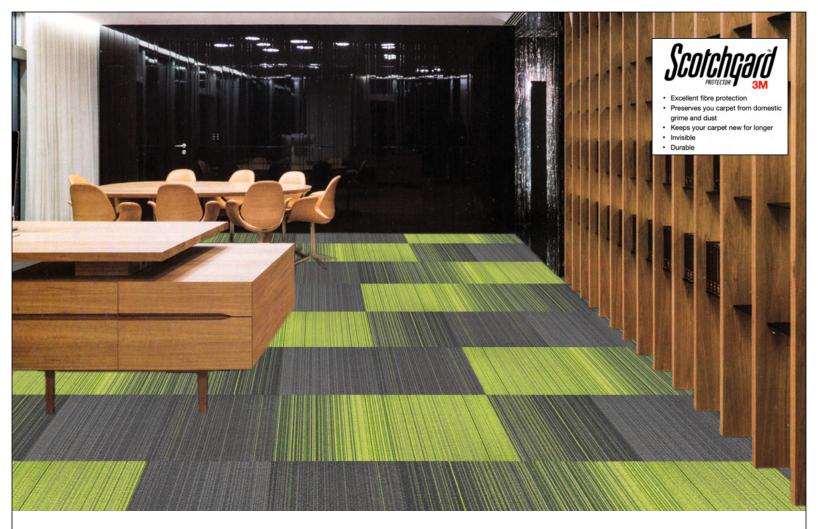

#### **Specifications**

Fibre	Universal Chromo Nylon
Construction	1/10th Inch Multi-Level Graphic Loop Pile
Pile Height	4-5 mm
Total Height	7mm
Pile Weight	650 gr /m <sup>2</sup>
Total Weight	4400 gr /m²
Primary Backing	Non Woven Lutrador
Secondary Backing	PVC + Fibre Glass
Size per Tile	50 cm X 50 cm
No. Of Tiles per Box	20pcs per box (5m <sup>2</sup> )
Stain Resistant	Yes
Antistatic Properties	Permanently Antistatic

#### **Environment**

The design and production of Colour Space Tile conforms to the ISO 14001:2004 Environmental Management System and complies with environmental regulations.

#### **Installation type**









DROP



TURN



### **Performance**

Flammability	Pass - 8 (ASTM D2859-11)
Colour Fastness	
To light.	Pass - Grade 5 (KS 08 359)
To wet and dry crocking	Pass - Grade 4-5 (KS 08 266)
Stability	
Delamination	Pass - 16.69 N/inch (KS 08-835)
Tuft Bind	Pass - 3.4 kg (ISO 4919)
Electrostatic Propensity	Pass: 100 Volt (ISO/TR6356)
Green Carpet (VOC)	CRI Green Label Plus - Accredited
	GLP 100263

#### Warranty

15 Year Carpet Wear Warranty Lifetime Anti-shock Carpet Warranty Ideal for Heavy Commercial Use.



The subfloor should be dry, smooth, flat, dust-free and resistant to compression and load-bearing. The seams may remain visible to the eye and this should be accepted as an inherent characteristic of carpet tiles. Due to dye lot variations, actual colour may vary slightly from the samples. Chair pads are recommended to prevent premature wear of carpet.







