

# Gravity

## Specifications

Construction	Multi Level Loop
Fibre	100% Solution Dyed Olefin
Gauge	1/12"
Stitches	10 per inch
Pile Weight	20 oz/yd2
Pile Height	4mm ± (0.5mm)
Backing	Eco Back (PVC free)
Tile Size	25cm x 100cm
Packing	20 pcs/Box

## Performance

### FLAMMABILITY


Radiant Panel	Pass - Class II (ASTM E 648)
Methenamine Pill	Pass - 8 (ASTM D 2859)
Smoke Density	Pass - Max 450 (ASTM E 662)

### COLOURFASTNESS

to light	Pass - 5 (AATCC 16 E)
to wet and dry crocking	Pass - 5 (AATCC 165)

### STABILITY

Dimensional stability	Pass - 0.2% (AACHEN)
Tuft Bind	Pass - 8.0 lbs (ASTM D1335)
Static Propensity	Pass - 3.5 Kv (AATCC 134)
Static Propensity	Pass - 2.8 (BS EN 985)
Green carpet (VOC)	<b>CRI Green Label Accredited GLP 6331#/6330#</b>

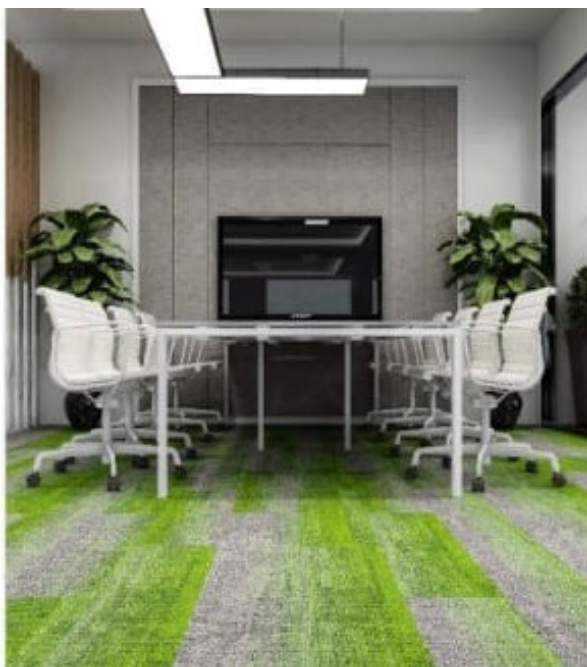




# Gravity





100 - Cloudy Grey  
102 - Rust Orange




# Gravity

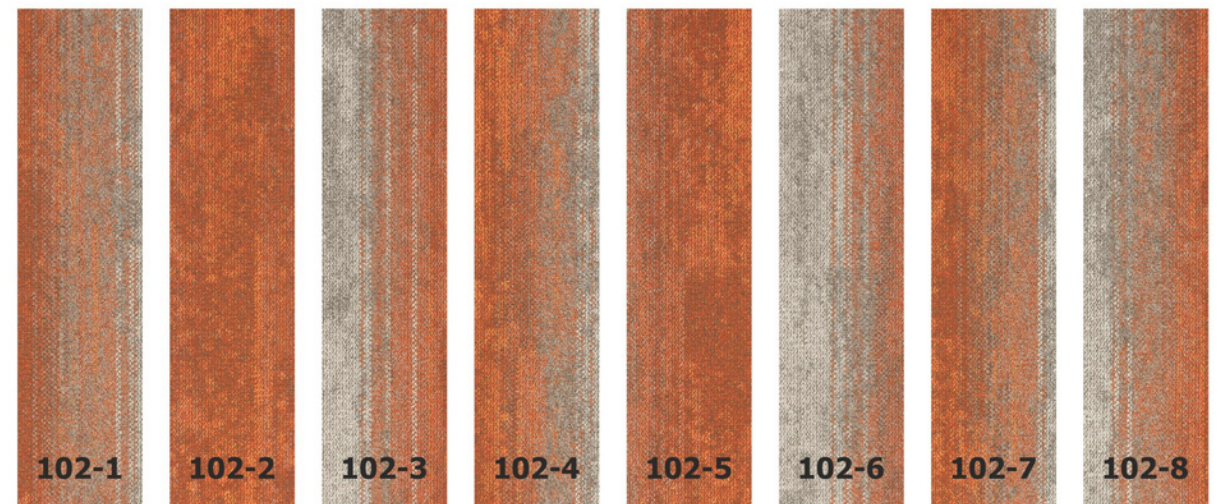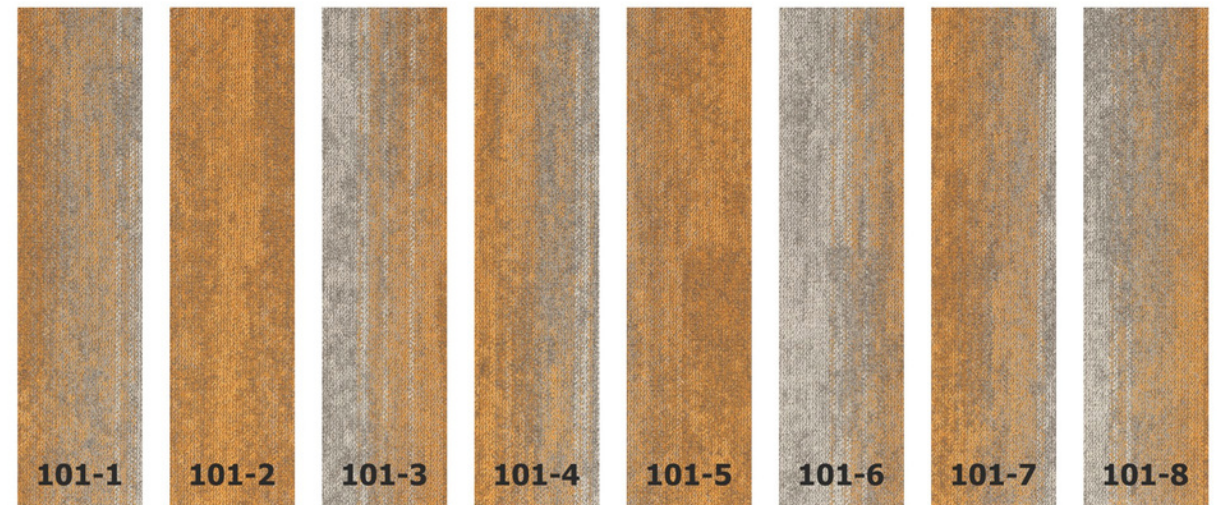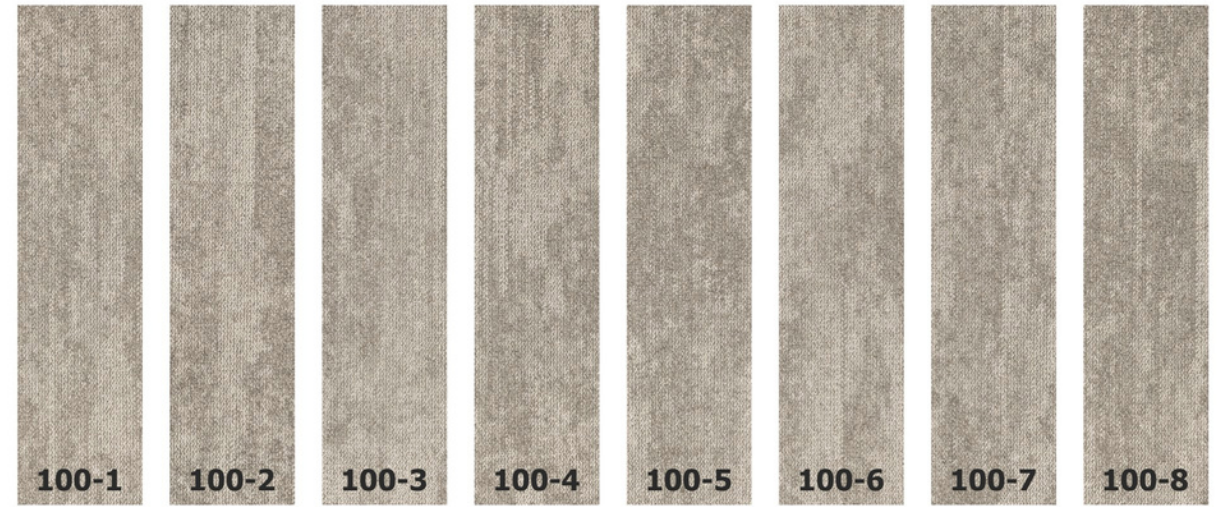



201 - Tiffany Blue  
202 - Cobalt Blue


# Gravity

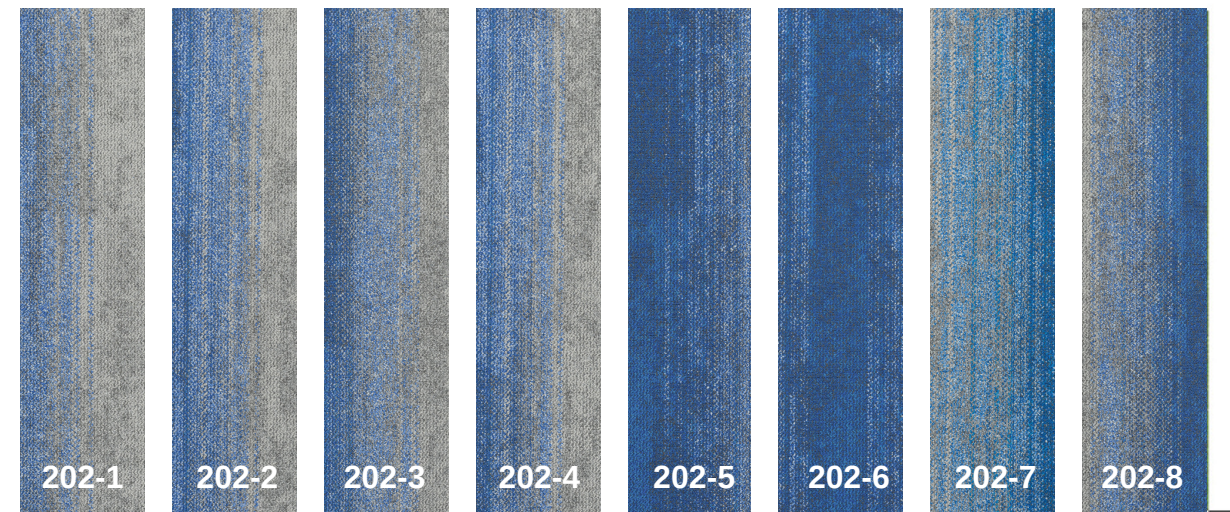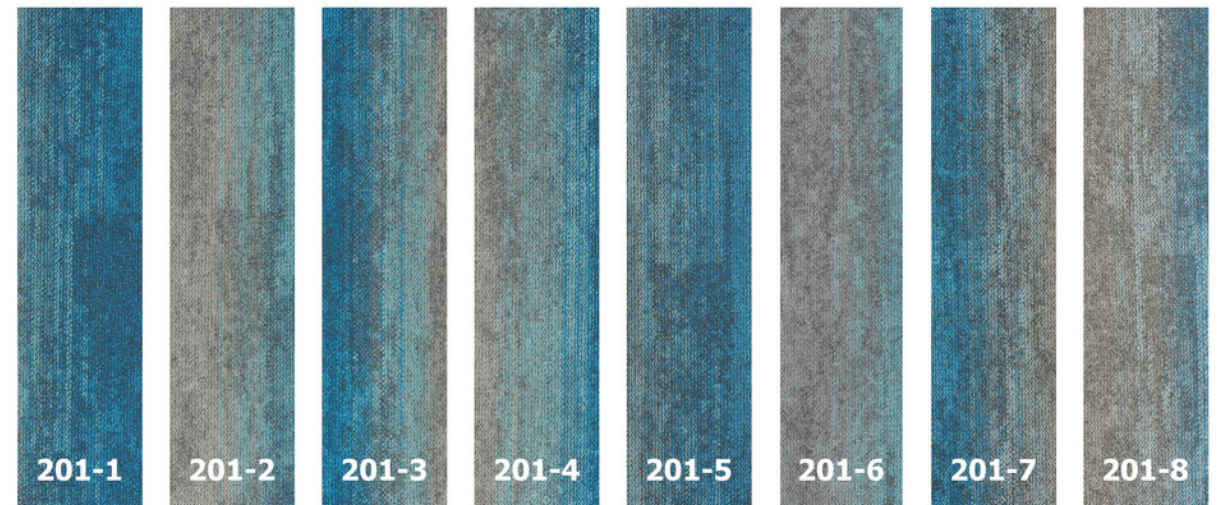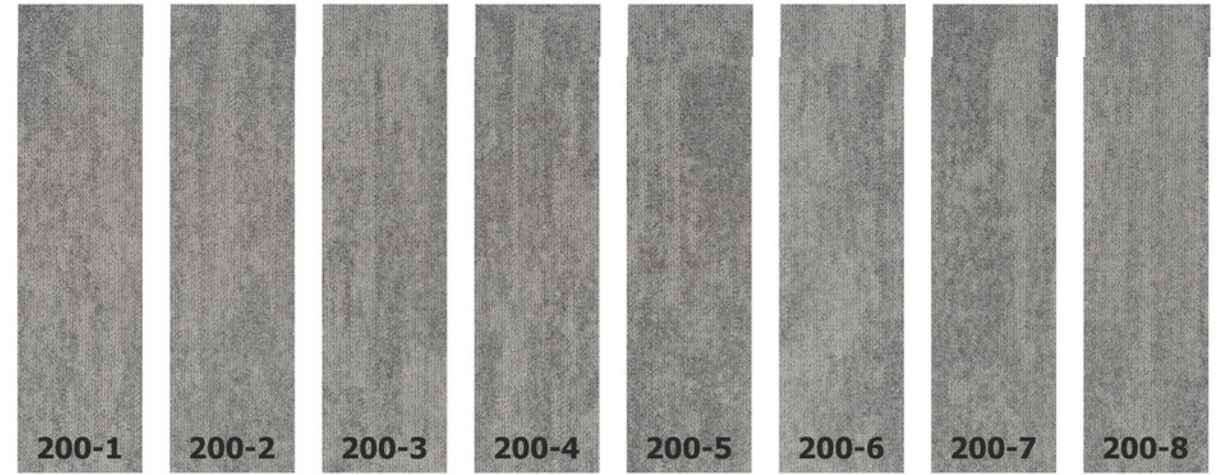



200 - Fossil Grey  
203 - Kelly Green

# Gravity

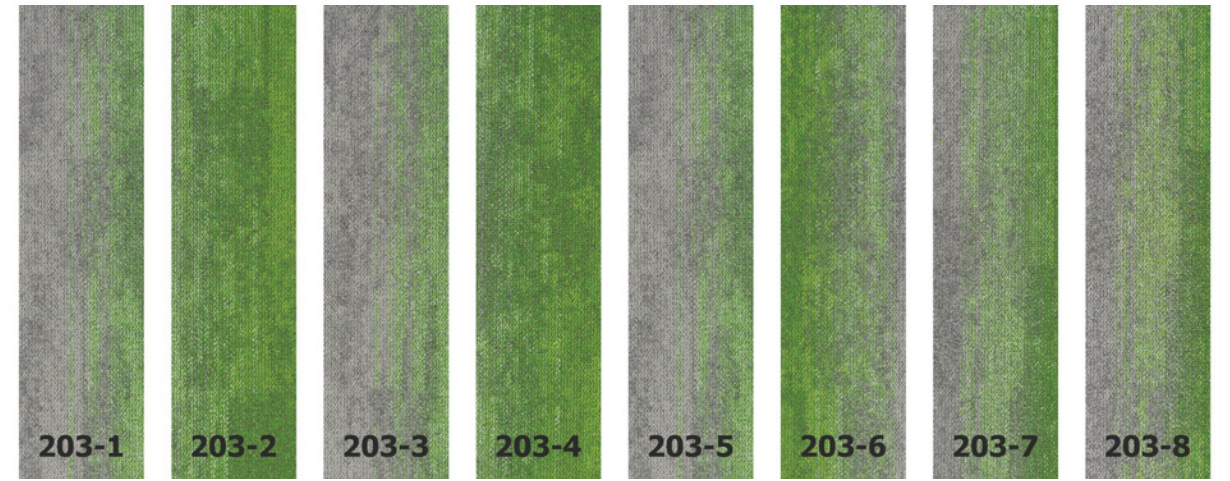

300 - Shadow Grey  
304 - Deep Orange



# Gravity

