

SUNGLOW



Specifications

Construction	Multi Level loop
Fiber	100 % Duratron Nylon
Gauge	1/12"
Stitches	11 Per Inch
Pile Weight	18 OZ/yd ²
Average Pile Height	2.5 + 0.4mm
Backing	E + Backing
Tile Size	25cm X 100cm
Traffic Classification	Class III Heavy Commercial
Anti-Microbial	Health Guard (Available)

Warranty

15 Year Carpet Wear Warranty
Lifetime Anti-shock Carpet Warranty
Ideal for Heavy Commercial Use.



The subfloor should be dry, smooth, flat, dust-free and resistant to compression and load-bearing. The seams may remain visible to the eye and this should be accepted as an inherent characteristic of carpet tiles. Due to dye lot variations, actual colour may vary slightly from the samples. Chair pads are recommended to prevent premature wear of carpet.

Installation type



Performance

Flammability Tests

Radiant Panel	Pass - Class I (ASTM E 648-10)
Smoke Density	Pass - Max 450 (ASTM E 662)
Static Propensity	Pass - 3.5 KV (AATCC 134)

Stability

Delamination	Pass - 23.0 lbc/in (ASTM D3936)
Dimensional Stability	Pass - 0.2% (AACHEN)
Tuft Bind	Pass - 8.0 lbs (ASTM D1335)

Color Fastness

Light	Pass - 5 (AATCC 116 E)
Rubbing/Crocking	Pass - 5 (AATCC 165)

Wear Tests

Castor Chair	Pass- 2.8 (BS EN 985)
--------------	-----------------------

Green Carpet (VOC)

CRI Green Label - Accredited	GLP 6331# / 6330#
------------------------------	-------------------

Environment

The design and production of SUN GLOW Tile conforms to the ISO 14001:2004 Environmental Management System and complies with environmental regulations.


my-floor®



01 - Grey
10 - Grey / M.Yellow
11 - Mustard Yellow

MY FLOOR
FLOORS THAT INSPIRE ENVY

SUNGLOW



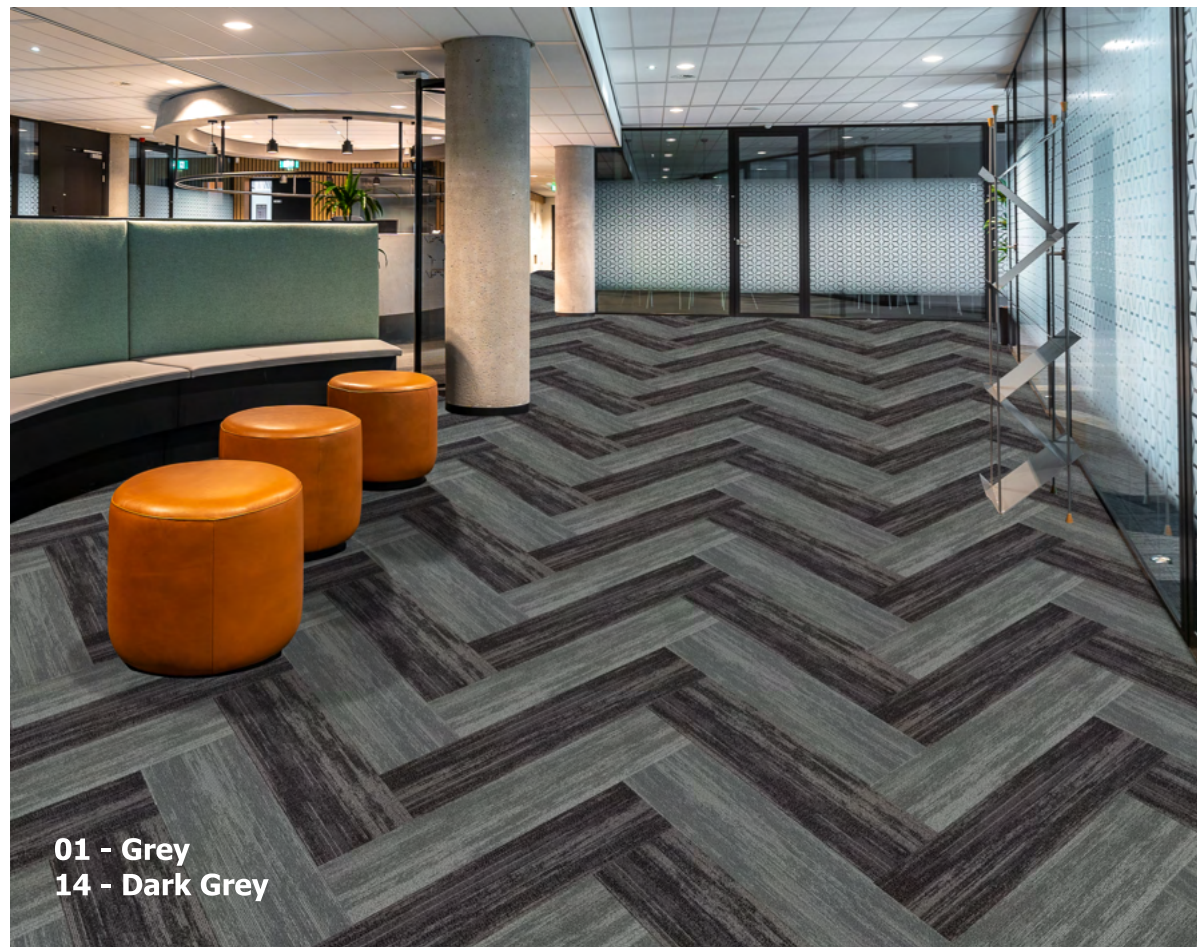


01 - Grey
14 - Dark Grey






03 - Cyan Blue
14 - Dark Grey

Sunglow

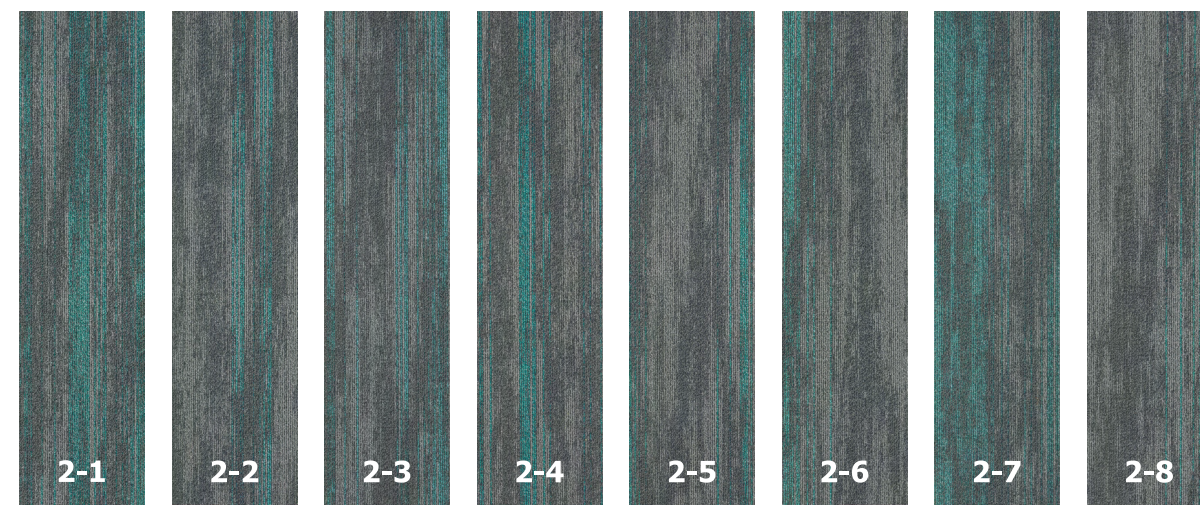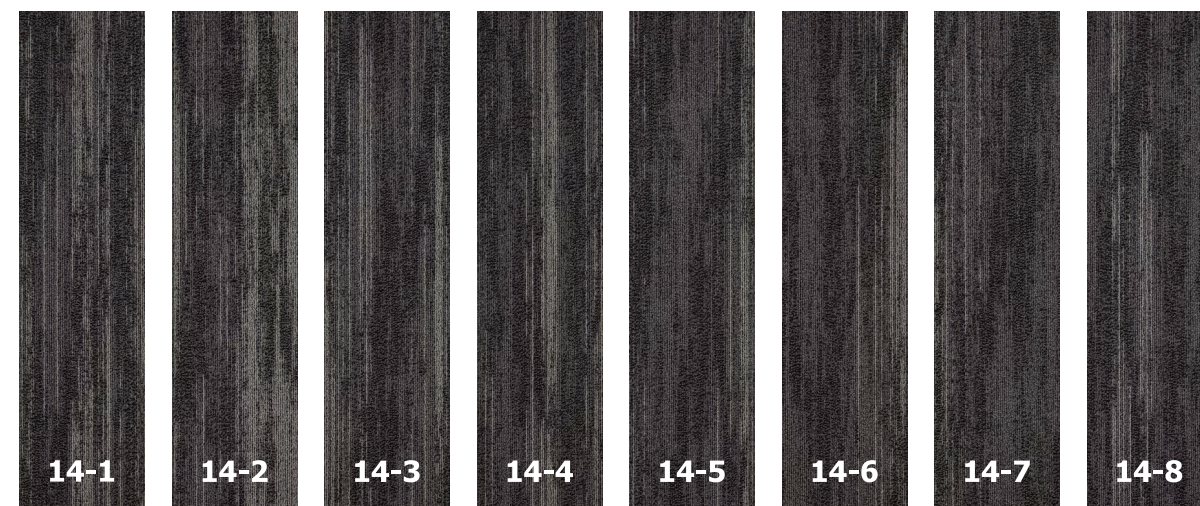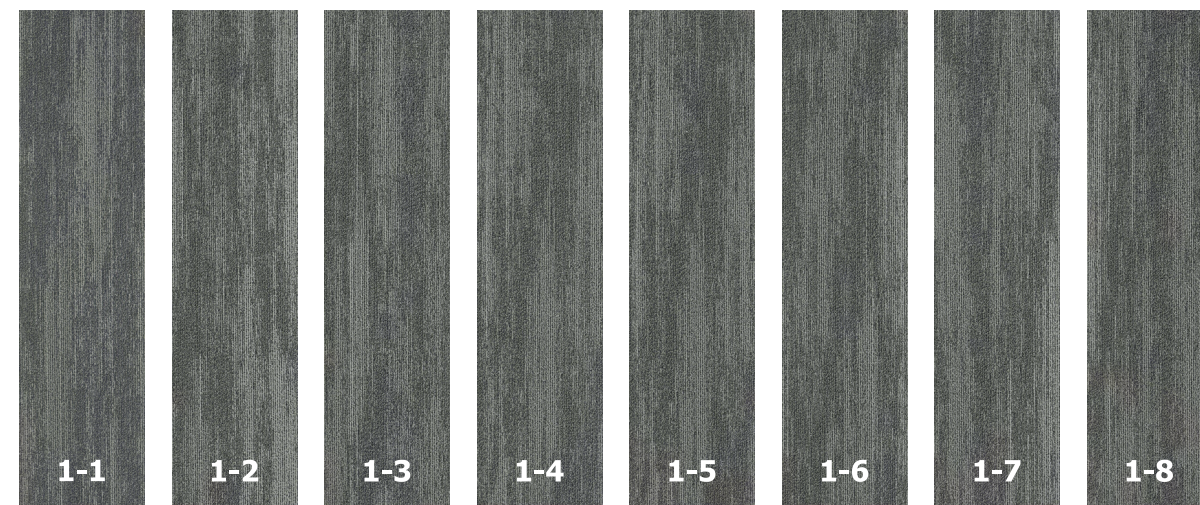





Sunglow

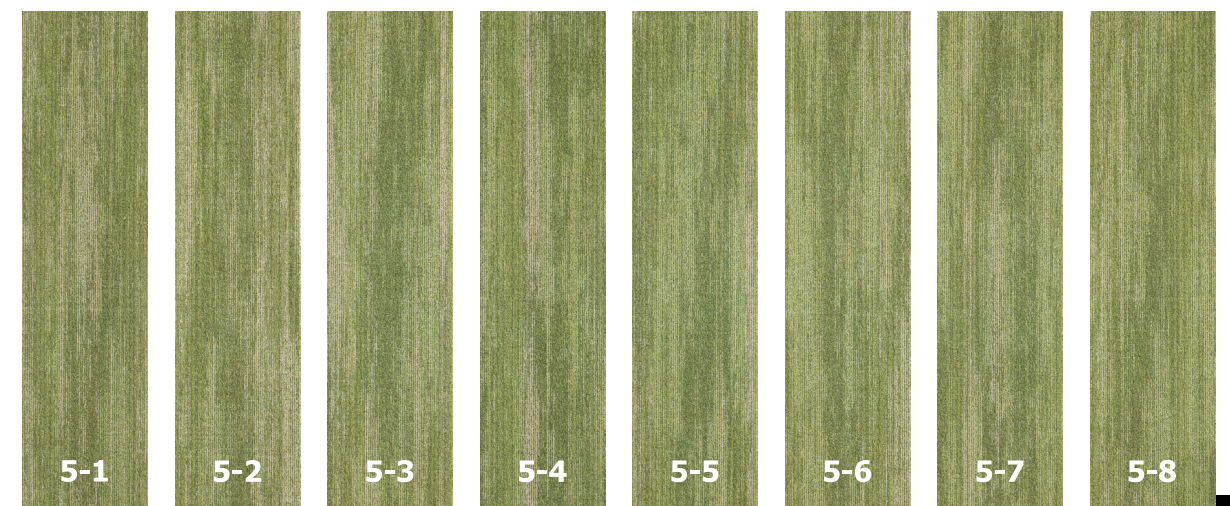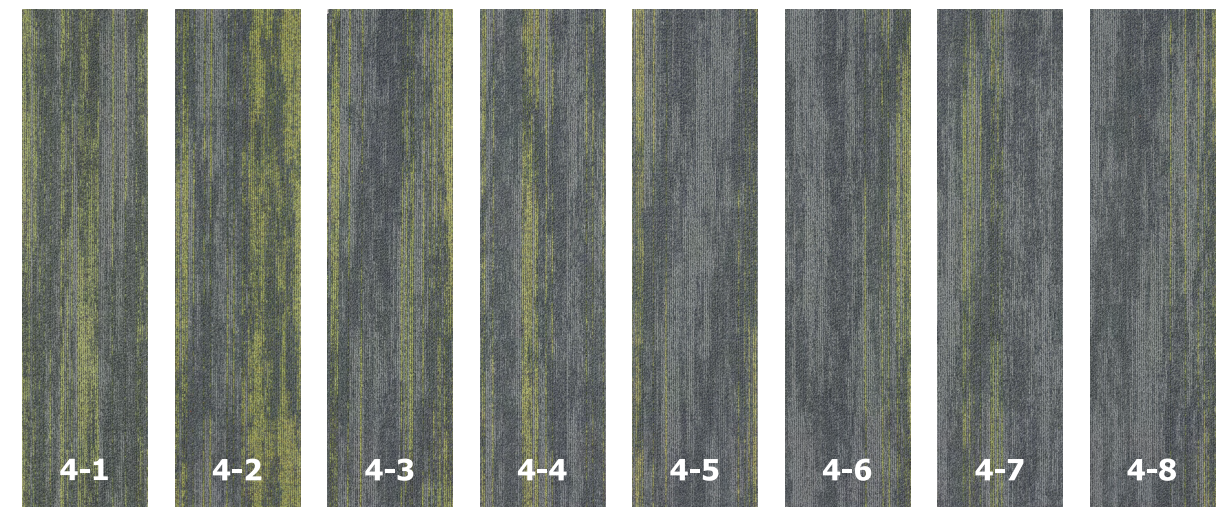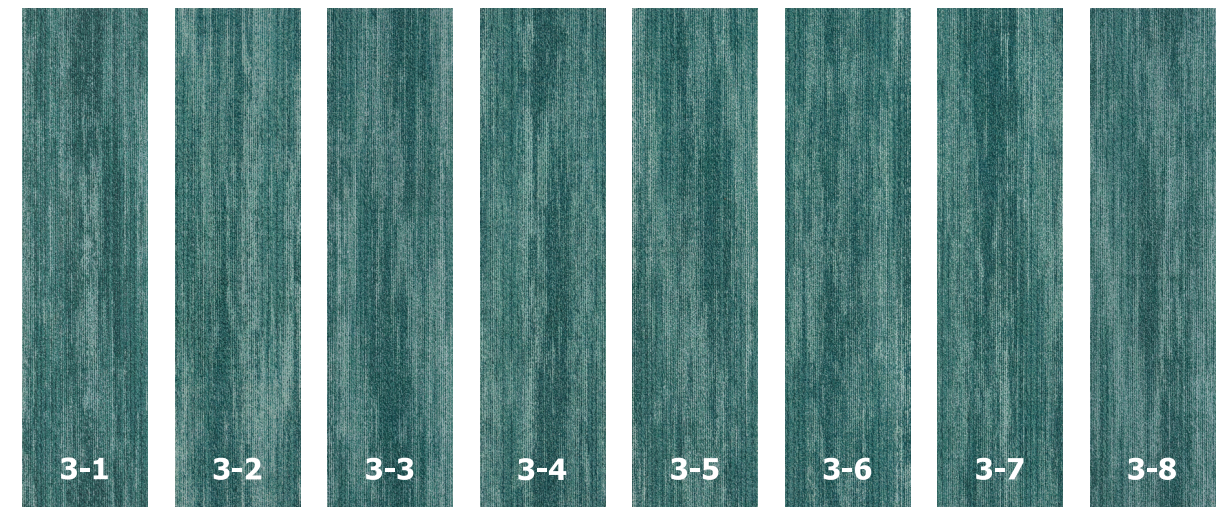



Sunglow

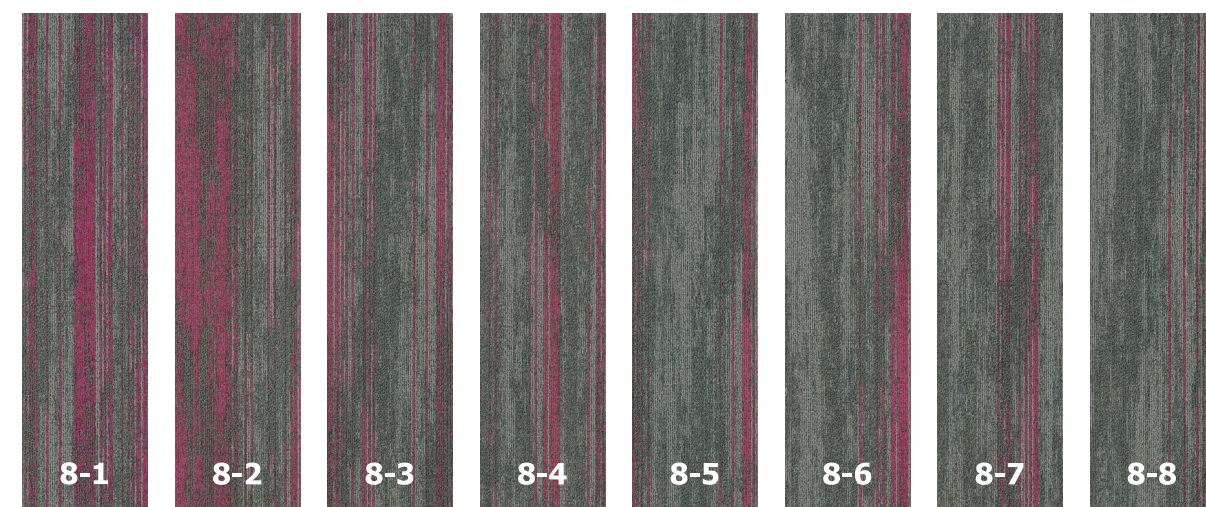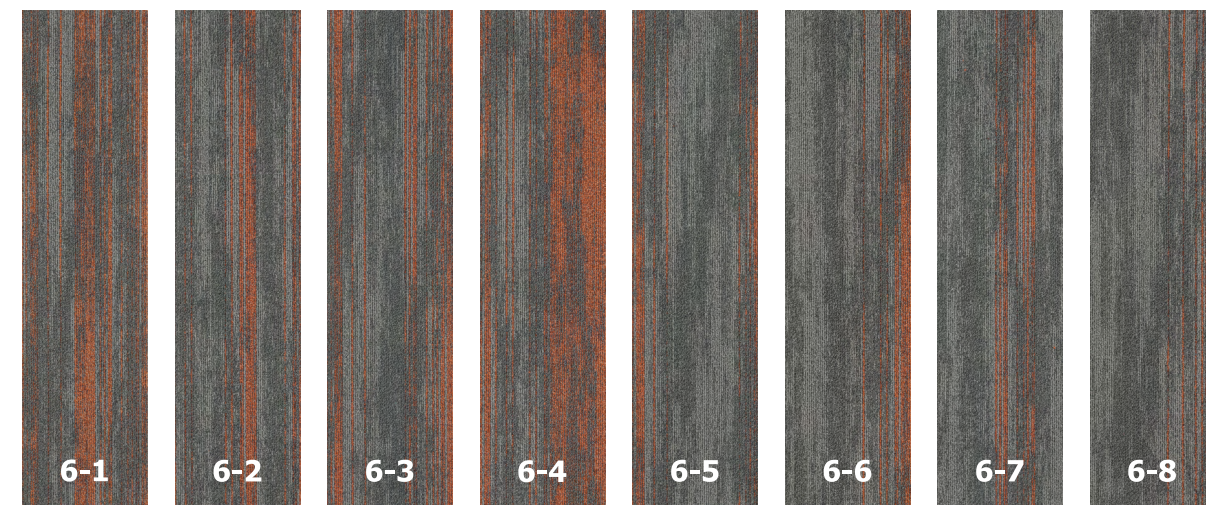



10 - Grey / Mustard Yellow
11 - Mustard Yellow

Sunglow

