




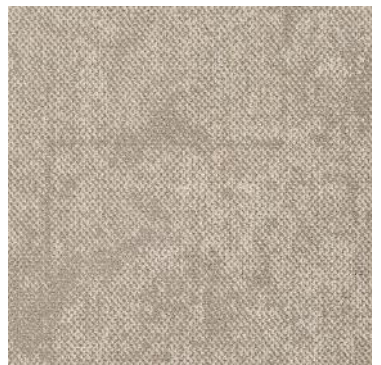

CLOUDLET

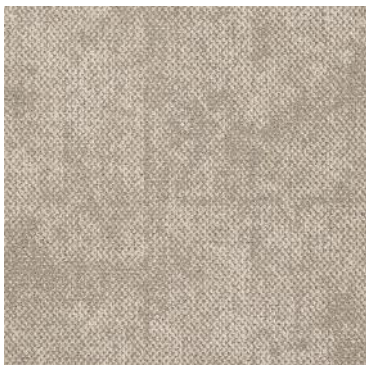


01

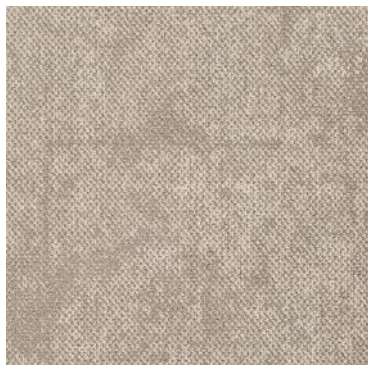



01
02
05





02

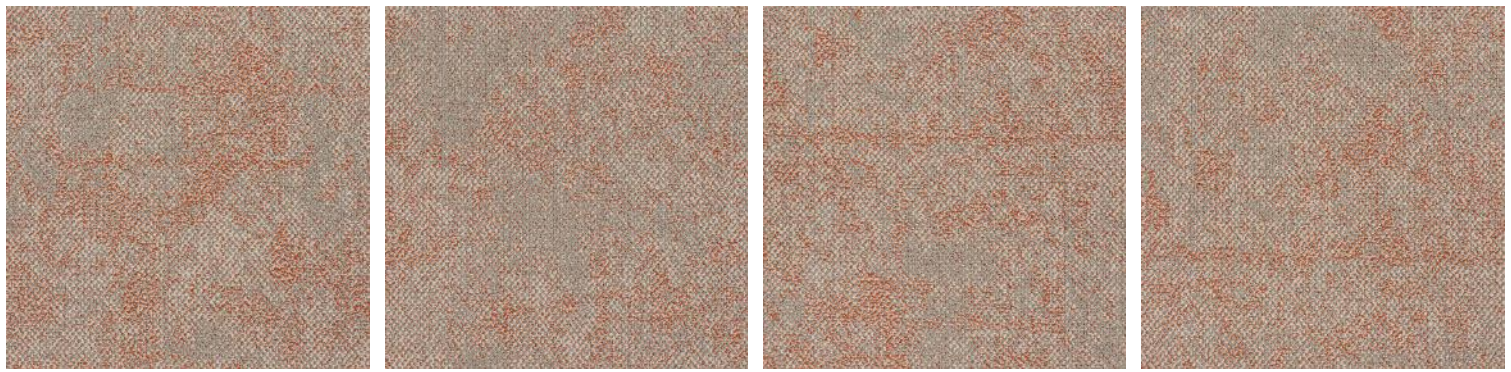



05


05

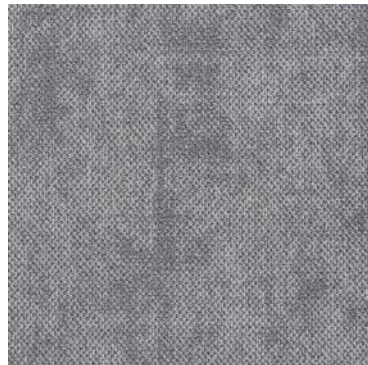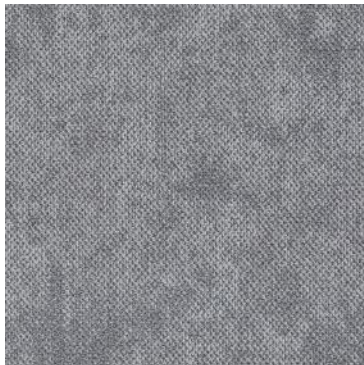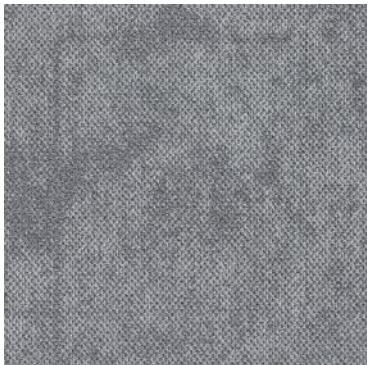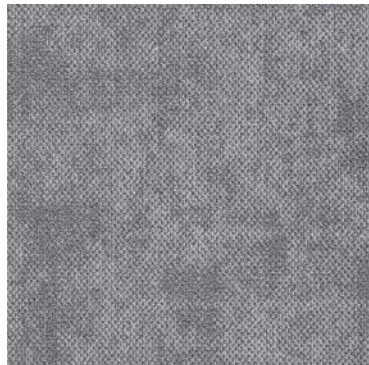



05
06


06

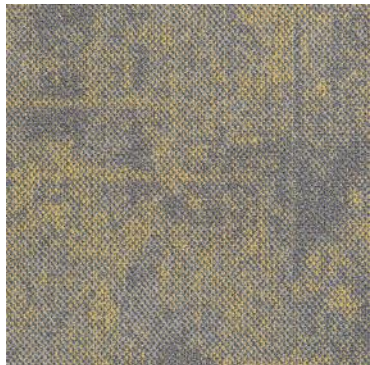



07





07

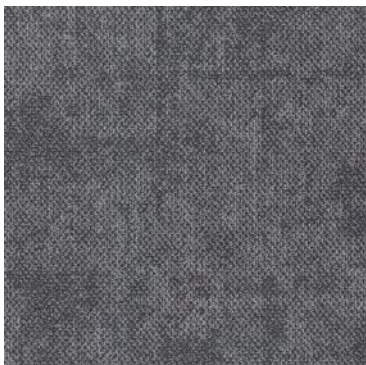



07
08

08

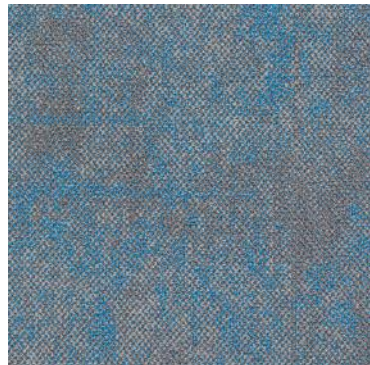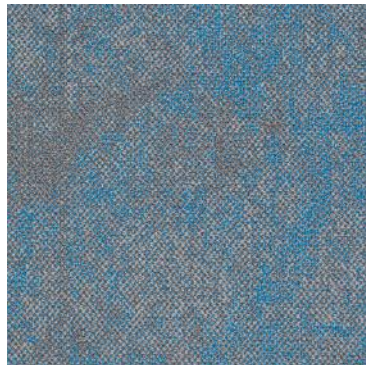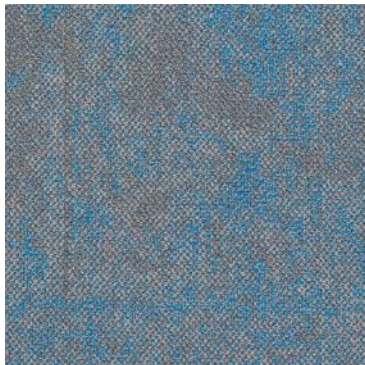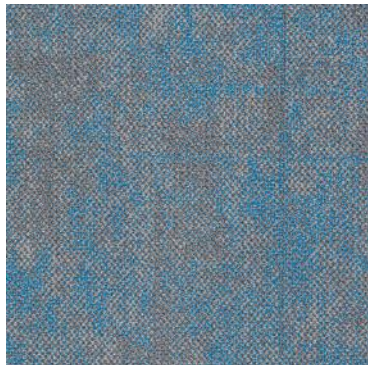



07
09

9




CLOUDLET


01




02

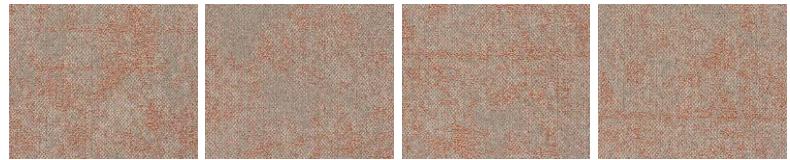


05

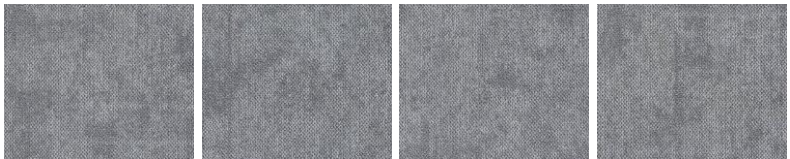

06

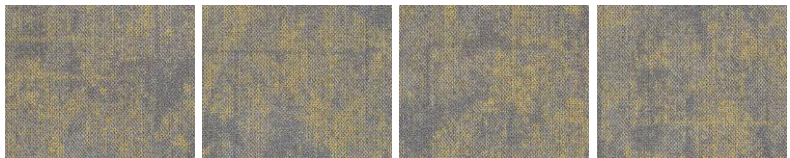

07

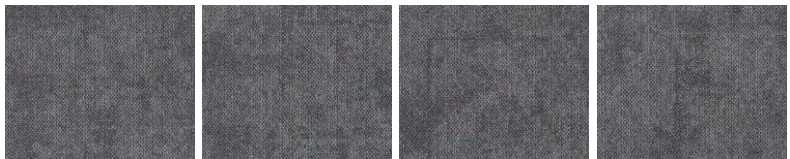

08



09



Construction:	Multi-level loop
Yarn:	Plencolor Nylon6
Color System:	100% Solution Dyed
Gauge:	1/12
Stitches:	10 per inch
Pile Weight:	16 oz/yd ²
Pile Height:	3.0mm-5.0 mm (±0.5mm)
Backing:	UltraEco
Tile Size:	50cm×50cm
Area of Use:	Heavy Commercial
Flammability:	Passes (ASTM E 648-17) Class I
	Passes (GB 8624-2012) B ₁
Smoke Density:	Passes ASTM E 662 Less than 450
Static Propensity:	Passes AATCC-134≤3.5kV
Static Control:	Life-of-the carpet Static Protection
Formaldehyde Purification:	Passes (JC/T 1074-2008) Class I

INSTALLATION METHODS



Declare. Ecover®

